

Batumi Double Head

1102.016.035.3000.80



Quickinfo

GENERAL

Indoor Lighting-Ceiling lights
Surface mounted
IP20
TRIDONIC
100-240 V 50/60Hz
Bridgelux
Shinland
Die-casting aluminum

LED

2x8 W
2x690 lm
3000 K
beam angle 35°
CRI > 80

OPTION



White Black

PACKING

8 PCS / CTN
G.W. 10.06 kg
CTN size 500x305x285 mm

DIMENSIONS


size in mm

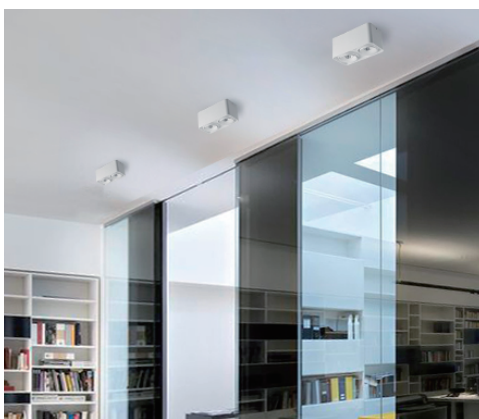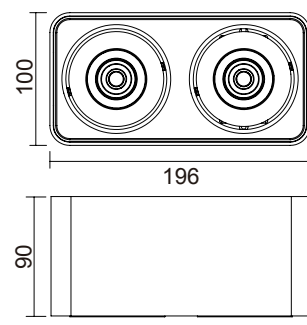

Sample image



ERP LABEL

DOBAC LED Batumi Double Head

 This luminaire contains built-in LED lamps

A++ } L
A+ } E
A } D
B
C
D
E

The lamps cannot be changed in the luminaire


847/2012  

Batumi Double Head


1102.016.035.3000.80



35° 3000K CRI >80

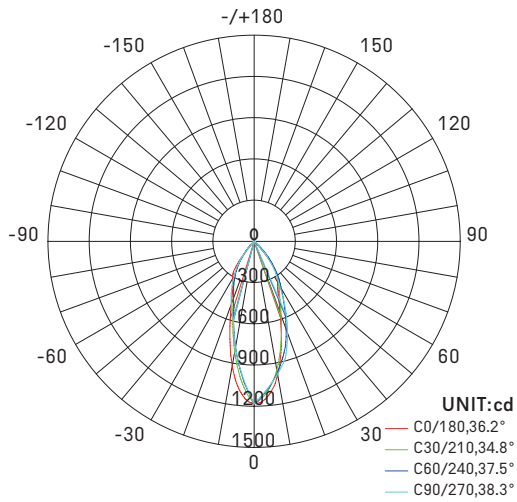

Flux out:259.7 lm

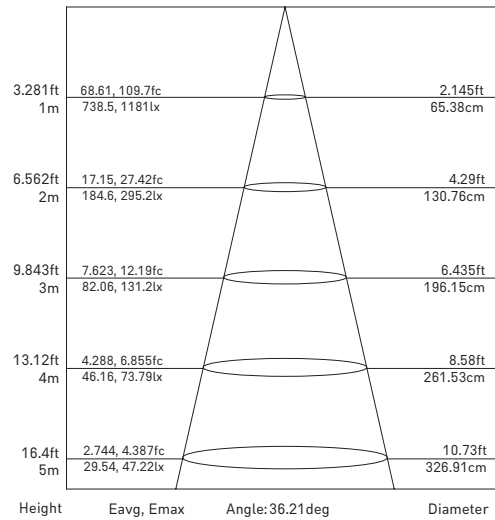

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

BATUMI FAMILY

Batumi Single Head

Batumi Double Head

Batumi Longer

Batumi Single Head



Batumi Single Head



Batumi Longer

