

Juvenis Recessed



Quickinfo

GENERAL

Indoor Lighting-recessed downlight
recessed
IP20
driver on board
220-240 V 50/60Hz
LUMENS
Shinland
Die-casting aluminum

COLOUR

○ White ● Black

ACCESSORIES



high chromatic led




anti-glare honeycomb louver



elliptical reflector | beam mixer diffuser

DIMENSIONS

size in mm

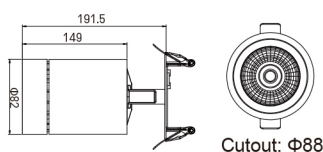


Cutout: $\Phi 88$



Purchase Code	Luminaire Power [W]	Luminaire Lumen [lm]	Color Temperature [K]	Beam Angle [°]	CRI [Ra]
6204.030.024.3000.90	30	2200	3000	24	>90
6204.030.030.3000.90	30	2250	3000	30	>90
6204.030.040.3000.90	30	2260	3000	40	>90

ERP LABEL

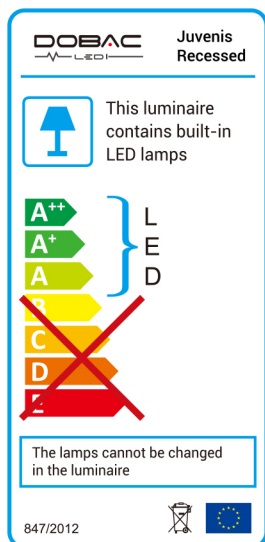

Sample image

Juvenis Recessed




6204.030.024.3000.90


Packing Info

12pcs / ctn
 G.W. 12.00kg
 ctn size 460x350x255 mm

30W 24° 3000K CRI >90

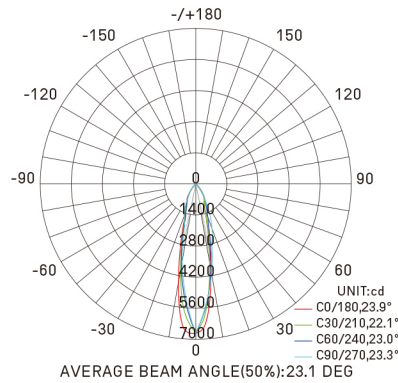

Flux out:623.6 lm

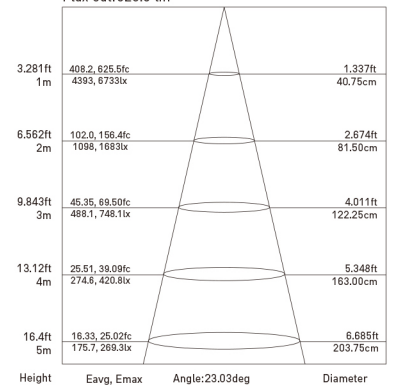


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

6204.030.030.3000.90


Packing Info

12pcs / ctn
 G.W. 12.00kg
 ctn size 460x350x255 mm

30W 30° 3000K CRI >90

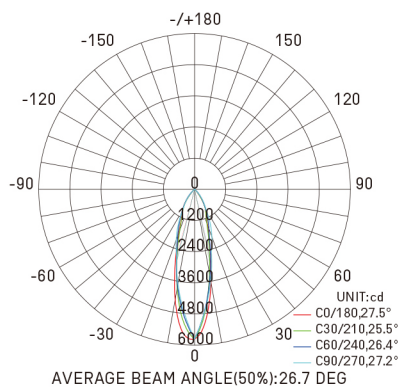

Flux out:401.8 lm

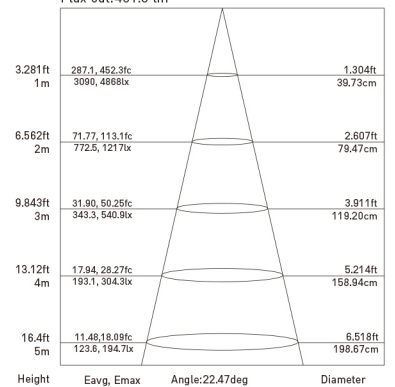


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

6204.030.040.3000.90


Packing Info

12pcs / ctn
 G.W. 12.00kg
 ctn size 460x350x255 mm

30W 40° 3000K CRI >90

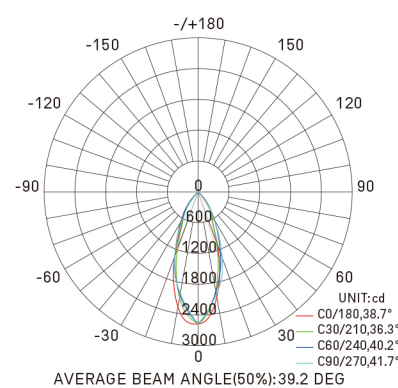

Flux out:674.6 lm

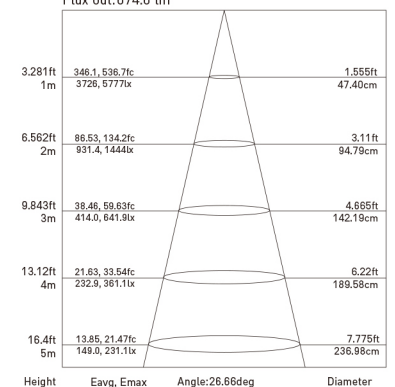

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.