

Niteo N



Quickinfo

GENERAL

Indoor Lighting-Wall light
 wall surface mounting
 IP20
 TRIDONIC
 100-240 V 50/60Hz
 Bridgelux
 Die-casting aluminum

COLOUR


○ White

PACKING

25 PCS / CTN
 G.W. 15.00 kg
 CTN size 520x155x500 mm



DIMENSIONS

size in mm



Purchase Code	Luminaire Power [W]	Luminaire Lumen [lm]	Color Temperature [K]	Beam Angle [°]	CRI [Ra]
5103.008.000.3000.80	8	385	3000	N/A	>80

ERP LABEL

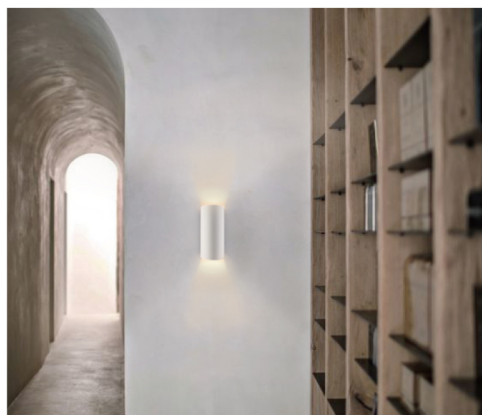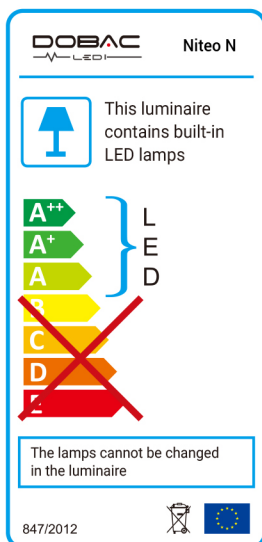

Sample image

Niteo N



NITEO FAMILY

Niteo X

Niteo A

Niteo N

Niteo D

Niteo X



Niteo A



Niteo N



Niteo D

