

Juvenis Recessed



Quickinfo

GENERAL

Indoor Lighting-recessed downlight
recessed
IP20
driver on board
220-240 V 50/60Hz
LUMENS
Shinland
Die-casting aluminum

COLOUR

○ White ● Black

ACCESSORIES



high chromatic led




anti-glare honeycomb louver



elliptical reflector | beam mixer diffuser


DIMENSIONS

size in mm

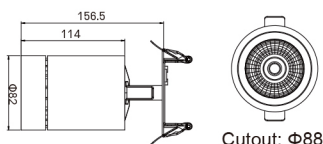

Cutout: $\Phi 88$

ERP LABEL

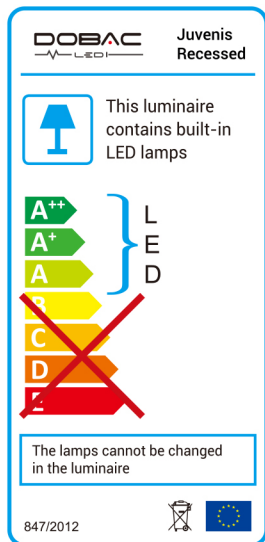

Purchase Code	Luminaire Power [W]	Luminaire Lumen [lm]	Color Temperature [K]	Beam Angle [°]	CRI [Ra]
6204.020.015.3000.90	20	1400	3000	15	>90
6204.020.024.3000.90	20	1400	3000	24	>90
6204.020.040.3000.90	20	1290	3000	40	>90



Sample image

Juvenis Recessed




6204.020.015.3000.90


Packing Info

12pcs / ctn
 G.W. 8.20kg
 ctn size 460x350x230 mm

20W 15° 3000K CRI >90

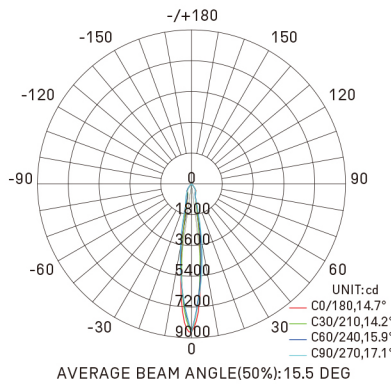

Flux out:321.3 lm

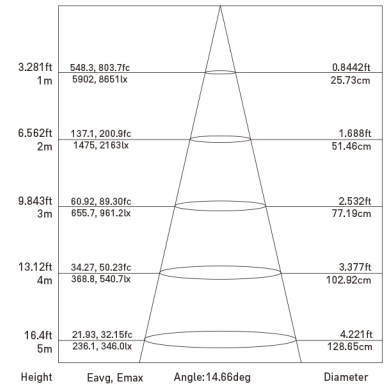


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

6204.020.024.3000.90


Packing Info

12pcs / ctn
 G.W. 8.20kg
 ctn size 460x350x230 mm

20W 24° 3000K CRI >90

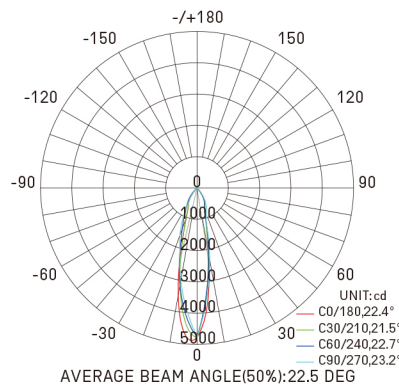

Flux out:401.8 lm

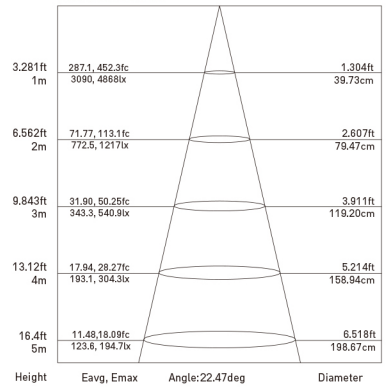


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

6204.020.040.3000.90


Packing Info

12pcs / ctn
 G.W. 8.20kg
 ctn size 460x350x230 mm

20W 40° 3000K CRI >90

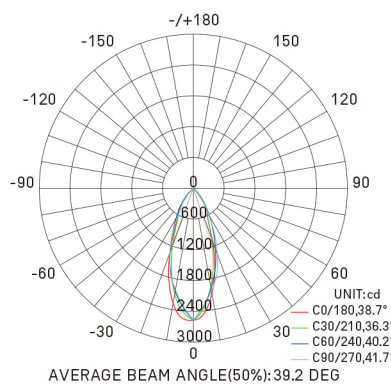

Flux out:646.4 lm

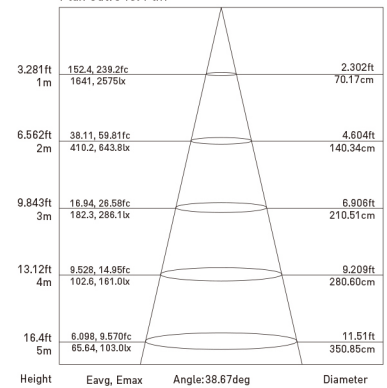

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.